

# Lecture 8: Synchronization exercises

601.418/618 Operating Systems

David Hovemeyer

February 17, 2025

# Agenda

- ▶ Readers/Writers (using semaphore)
- ▶ Bounded Buffer (using semaphores)
- ▶ Readers/Writers (as a monitor with condition variables)
- ▶ Bounded Buffer (as a monitor with condition variables)

Acknowledgments: These slides are shamelessly adapted from [Prof. Ryan Huang's Fall 2022 slides](#), which in turn are based on [Prof. David Mazières's OS lecture notes](#).

# Using semaphores

We've looked at a simple example for using synchronization

- ▶ Mutual exclusion while accessing a bank account

Now let's use semaphores to look at more interesting examples

- ▶ Readers/Writers
- ▶ Bounded Buffers

# Readers/Writers Problem

Readers/Writers Problem:

- ▶ An object is shared among several threads
- ▶ Some threads only read the object, others only write it
- ▶ We can allow multiple readers but only one writer
  - ▶ Let  $\#r$  be the number of readers,  $\#w$  be the number of writers
  - ▶ Safety:  $(\#r \geq 0) \wedge (0 \leq \#w \leq 1) \wedge ((\#r > 0) \implies (\#w = 0))$

How can we use semaphores to implement this protocol?

Start with. . .

- ▶ Semaphore  $w\_or\_r$  – exclusive writing or reading

## Readers/Writers

Is this correct? Are we done?

```
// exclusive writer or reader
Semaphore w_or_r(1);

// number of readers
int readcount = 0;
// mutual exclusion to readcount
Semaphore mutex(1);

writer() {
    wait(&w_or_r); // lock out others
    Write;
    signal(&w_or_r); // up for grabs
}
```


```
reader() {
    wait(&mutex); // lock readcount
    readcount += 1; // one more reader
    if (readcount == 1)
        wait(&w_or_r); // synch w/ writers
    signal(&mutex); // unlock readcount
    Read;
    wait(&mutex); // lock readcount
    readcount -= 1; // one less reader
    if (readcount == 0)
        signal(&w_or_r); // up for grabs
    signal(&mutex); // unlock readcount
}
```

# Readers/Writers

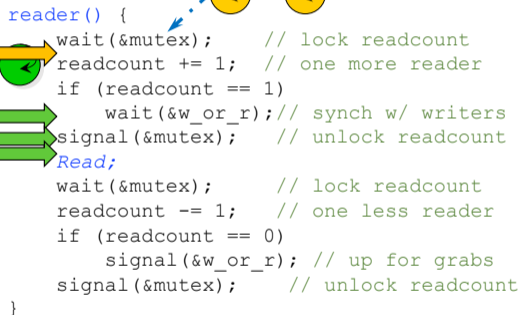
```
// exclusive writer or reader
Semaphore w_or_r(1);

// number of readers
int readcount = 0;
// mutual exclusion to readcount
Semaphore mutex(1);

writer() {
    wait(&w_or_r); // lock out others
    Write;
    signal(&w_or_r); // up for grabs
}
```

A diagram illustrating the writer function. A red circle with a black arrow pointing left is positioned above the 'wait(&w\_or\_r);' line. A blue dashed arrow points from this circle to the 'wait(&w\_or\_r);' line. An orange circle with a black arrow pointing left is positioned to the left of the 'Write;' line. An orange arrow points from this circle to the 'Write;' line.

```
reader() {
    wait(&mutex); // lock readcount
    readcount += 1; // one more reader
    if (readcount == 1)
        wait(&w_or_r); // synch w/ writers
    signal(&mutex); // unlock readcount
    Read;
    wait(&mutex); // lock readcount
    readcount -= 1; // one less reader
    if (readcount == 0)
        signal(&w_or_r); // up for grabs
    signal(&mutex); // unlock readcount
}
```

A diagram illustrating the reader function. At the top, two yellow circles with black arrows pointing left are connected by a double-headed black arrow. A blue dashed arrow points from the left yellow circle to the 'wait(&mutex);' line. A green circle with a black arrow pointing left is positioned to the left of the 'wait(&mutex);' line. An orange arrow points from this circle to the 'wait(&mutex);' line. Three green arrows point from the left to the 'wait(&w\_or\_r);' line. A green circle with a black arrow pointing left is positioned to the left of the 'signal(&mutex);' line. An orange arrow points from this circle to the 'signal(&mutex);' line. A green circle with a black arrow pointing left is positioned to the left of the 'Read;' line. An orange arrow points from this circle to the 'Read;' line.

## Readers/Writers Notes

w\_or\_r provides mutex between readers and writers

- ▶ writer wait/signal, reader wait/signal when readcount goes from 0 to 1 or from 1 to 0.

If a writer is writing, where will readers be waiting?

Once a writer exits, all readers can fall through

- ▶ Which reader gets to go first?
- ▶ Is it guaranteed that all readers will fall through?

If readers and writers are waiting, and a writer exits, who goes first?

Why do readers use mutex?

Why don't writers use mutex?

What if the signal is above "if (readcount == 1)"?

## Bounded Buffer

Problem: a set of buffers shared by producer and consumer threads

- ▶ *Producer* inserts resources into the buffer set
  - ▶ Output, disk blocks, memory pages, processes, etc.
- ▶ *Consumer* removes resources from the buffer set
- ▶ Whatever is generated by the producer

Producer and consumer execute at different rates

- ▶ No serialization of one behind the other
- ▶ Tasks are independent (easier to think about)
- ▶ The buffer set allows each to run without explicit handoff

Safety:

- ▶ Sequence of consumed values is prefix of sequence of produced values
- ▶ If  $nc$  is number consumed,  $np$  number produced, and  $N$  the size of the buffer, then
$$0 \leq np - nc \leq N$$



## Bounded Buffer (2)

$$0 \leq np - nc \leq N \iff 0 \leq (nc - np) + N \leq N$$

Use three semaphores:

- ▶ **empty**: number of empty buffers
  - ▶ Counting semaphore
  - ▶  $\text{empty} = (nc - np) + N$
- ▶ **full**: number of full buffers
  - ▶ Counting semaphore
  - ▶  $\text{full} = np - nc$
- ▶ **mutex**: mutual exclusion to shared set of buffers
  - ▶ Binary semaphore

## Bounded Buffer (3)

```
Semaphore mutex(1); // mutual exclusion to shared set of buffers
Semaphore empty(N); // count of empty buffers (all empty to start)
Semaphore full(0); // count of full buffers (none full to start)
```

```
producer() {
    while (1) {
        Produce new resource;
        wait(&empty); // wait for empty buffer
        wait(&mutex); // lock buffer list
        Add resource to an empty buffer;
        signal(&mutex); // unlock buffer list
        signal(&full); // note a full buffer
    }
}
```

```
consumer() {
    while (1) {
        wait(&full); // wait for a full buffer
        wait(&mutex); // lock buffer list
        Remove resource from a full buffer;
        signal(&mutex); // unlock buffer list
        signal(&empty); // note an empty buffer
        Consume resource;
    }
}
```

## Bounded Buffer (4)

**Why do we need the mutex at all?**

**Where are the critical sections?**

What has to hold for deadlock to occur?

- ▶  $\text{empty} = 0$  and  $\text{full} = 0$
- ▶  $(nc - np) + N = 0$  and  $np - nc = 0$
- ▶  $N = 0$

What happens if operations on mutex and full/empty are switched around?

- ▶ The pattern of signal/wait on full/empty is a common construct often called an interlock

Readers/Writers and Bounded Buffer are classic synchronization problems

# Monitor Readers and Writers

Using Mesa monitor semantics.

Will have four methods: `StartRead`, `StartWrite`, `EndRead` and `EndWrite`

Monitored data:  $nr$  (# of readers) and  $nw$  (# of writers) with monitor invariant

$$(nr \geq 0) \wedge (0 \leq nw \leq 1) \wedge ((nr > 0) \implies (nw = 0))$$

Two conditions:

- ▶ `canRead`:  $nw = 0$
- ▶ `canWrite`:  $(nr = 0) \wedge (nw = 0)$

# Monitor Readers and Writers

## Try #1

- ▶ Will be safe, maybe not live: why?

```
Monitor RW {
  int nr = 0, nw = 0;
  Condition canRead, canWrite;

  void StartRead () {
    while (nw != 0) wait(canRead);
    nr++;
  }

  void EndRead () {
    nr--;
  }
}
```

```
void StartWrite {
  while (nr != 0 || nw != 0) wait(canWrite);
  nw++;
}

void EndWrite () {
  nw--;
}
} // end monitor
```


# Monitor Readers and Writers

Need to add `signal()` and `broadcast()`

```
Monitor RW {
  int nr = 0, nw = 0;
  Condition canRead, canWrite;


  void StartRead () {
    while (nw != 0) wait(canRead);
    nr++;
  }

  void EndRead () {
    nr--;
    if (nr == 0) signal(canWrite);
  }
}
```



```
void StartWrite () {
  while (nr != 0 || nw != 0) wait(canWrite);
  nw++;
}

void EndWrite () {
  nw--;
  broadcast(canRead);
  signal(canWrite);
}
} // end monitor
```



## Monitor Readers and Writers

Is there any priority between readers and writers?

What if you wanted to ensure that a waiting writer would have priority over new readers?

# Monitor Bounded Buffer

```
Monitor bounded_buffer {
  Resource buffer[N];
  // Variables for indexing buffer
  // monitor invariant involves these vars
  Condition not_full; // space in buffer
  Condition not_empty; // value in buffer

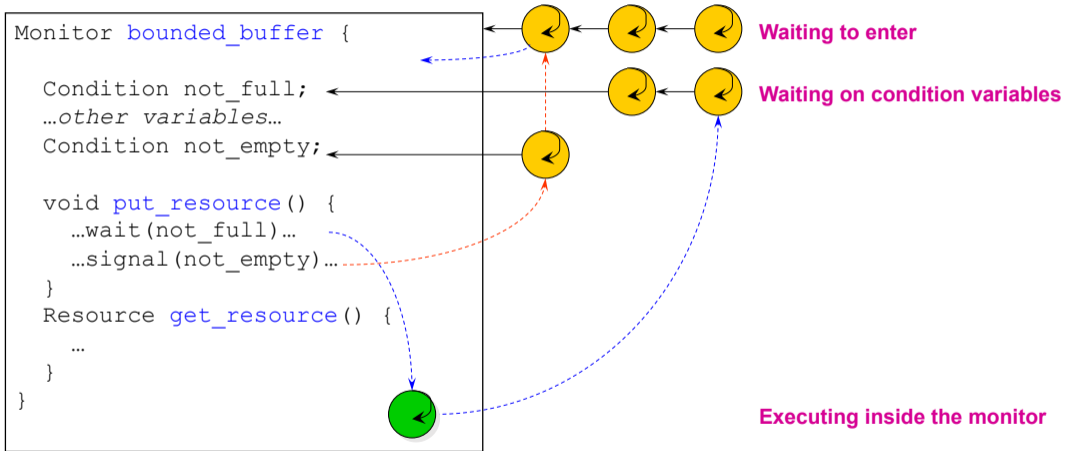
  void put_resource (Resource R) {
    while (buffer array is full)
      wait(not_full);
    Add R to buffer array;
    signal(not_empty);
  }
}
```

```
Resource get_resource() {
  while (buffer array is empty)
    wait(not_empty);
  Get resource R from buffer array;
  signal(not_full);
  return R;
} // end monitor
```

What happens if no threads are waiting when signal is called?



# Monitor Queues



Next time

Deadlock (!)